





PROVING OUR METTLE

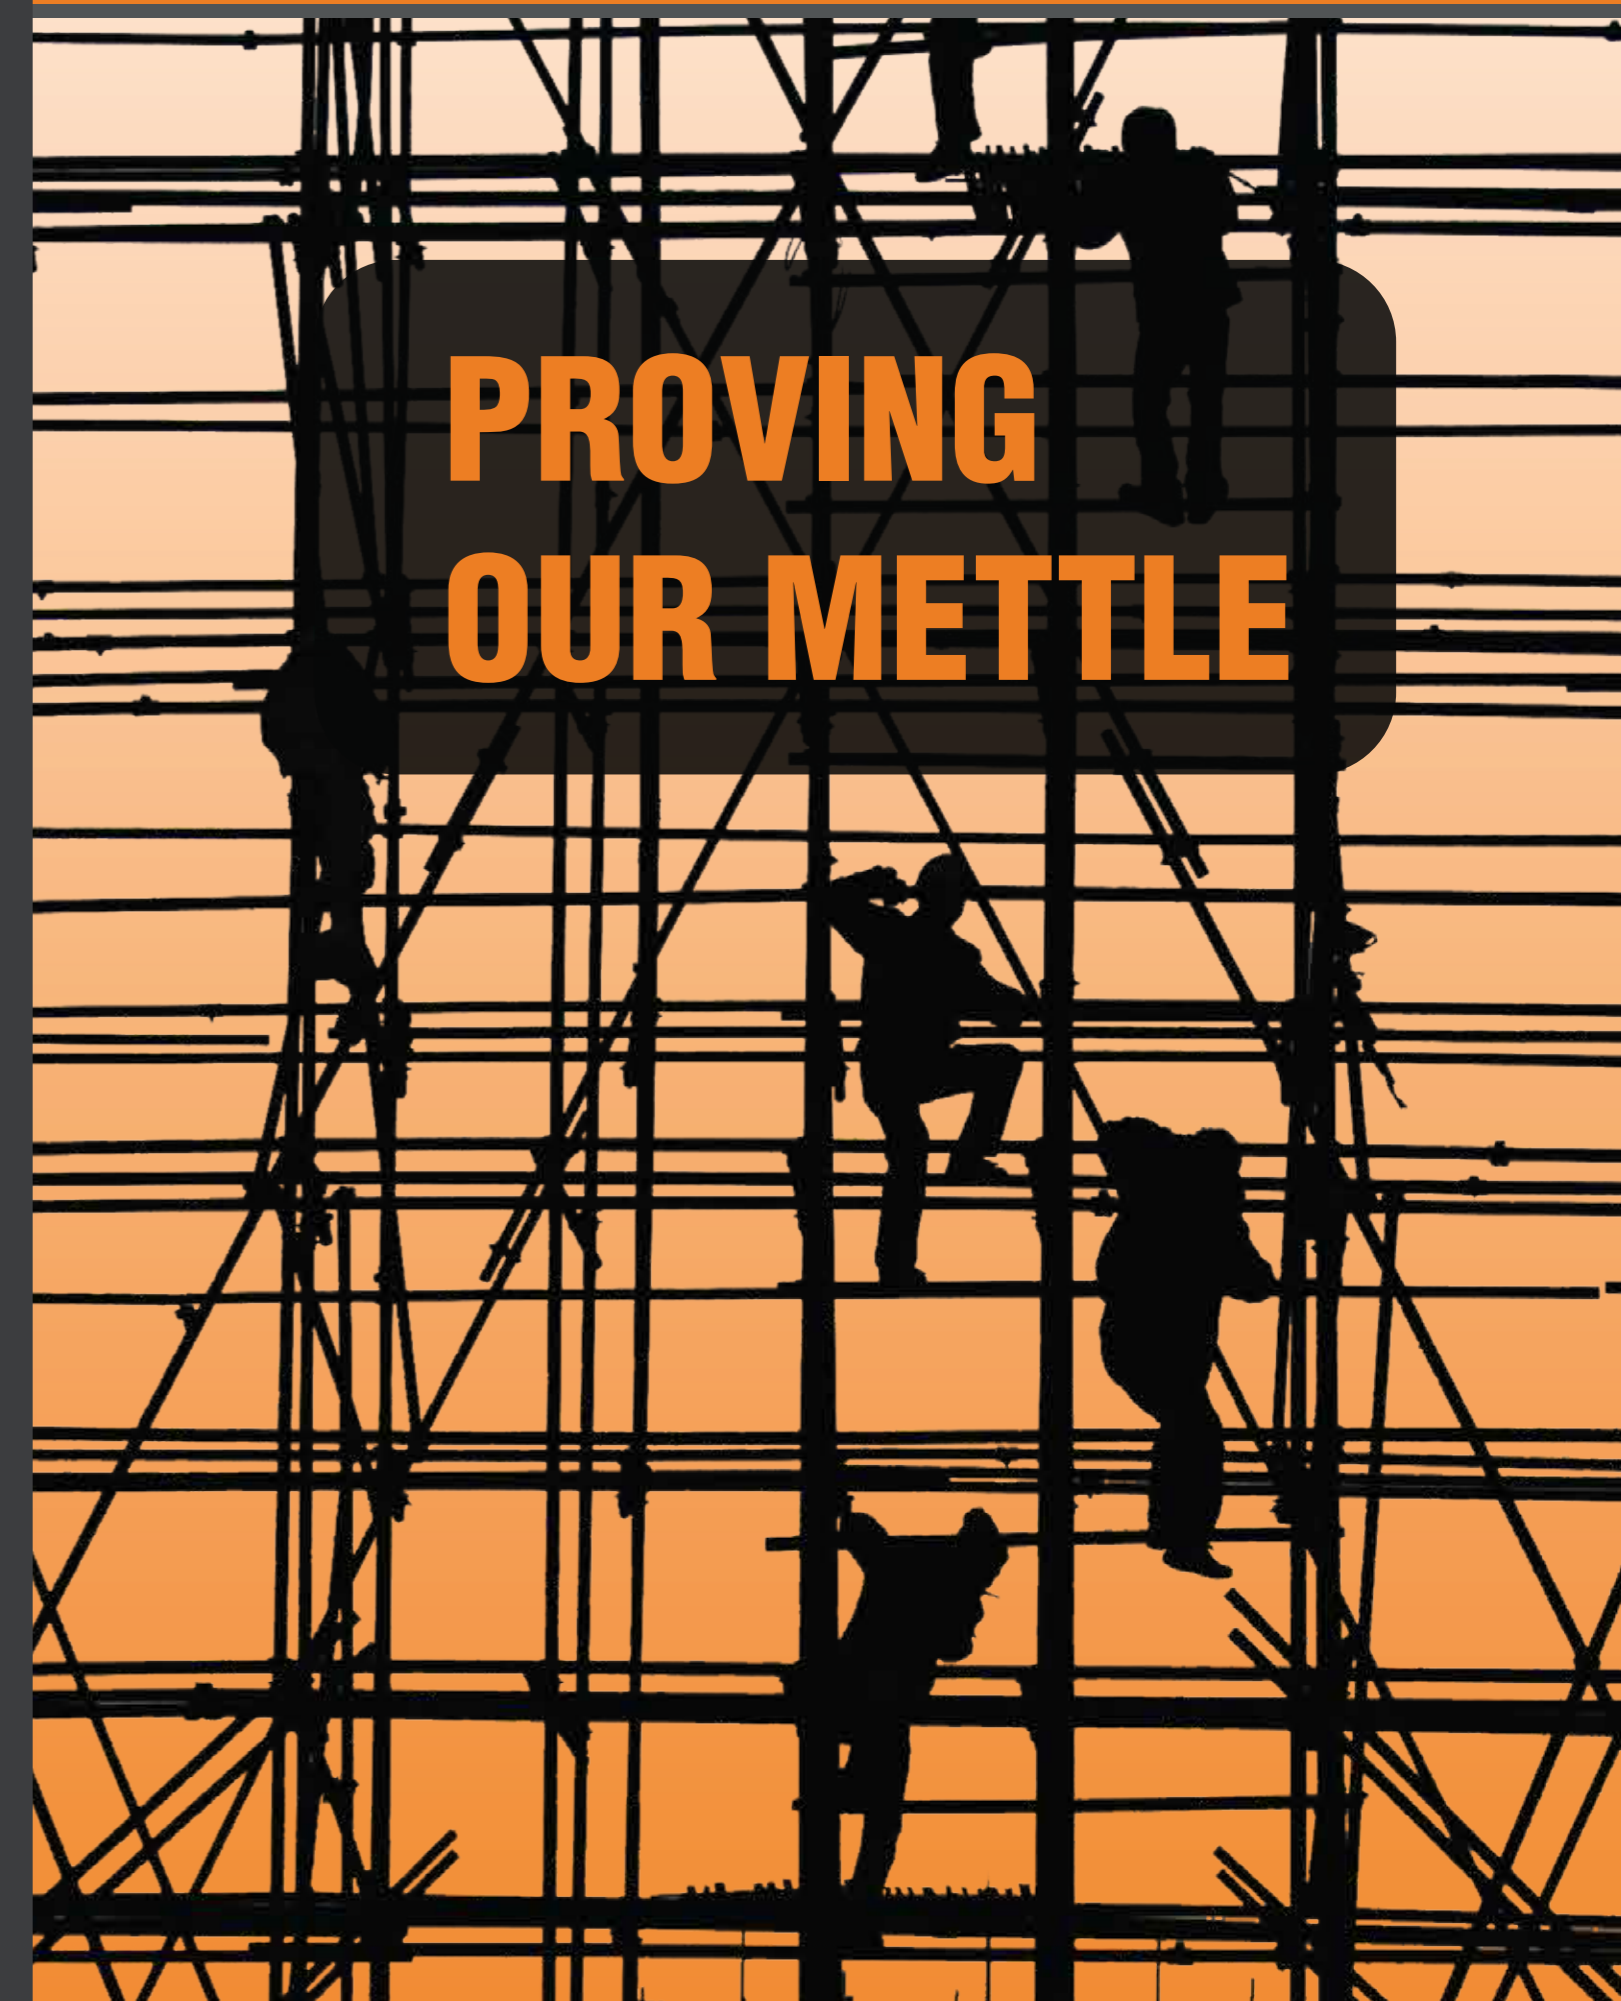

Presence

We own three state-of-the-art manufacturing units in Telangana, Andhra Pradesh & Tamil Nadu . We have deployed latest technology in all the three units. The machinery is operated by the most efficient team of professionals who acquire in depth knowledge in designing and engineering the products as according to the industrial needs of modern India.

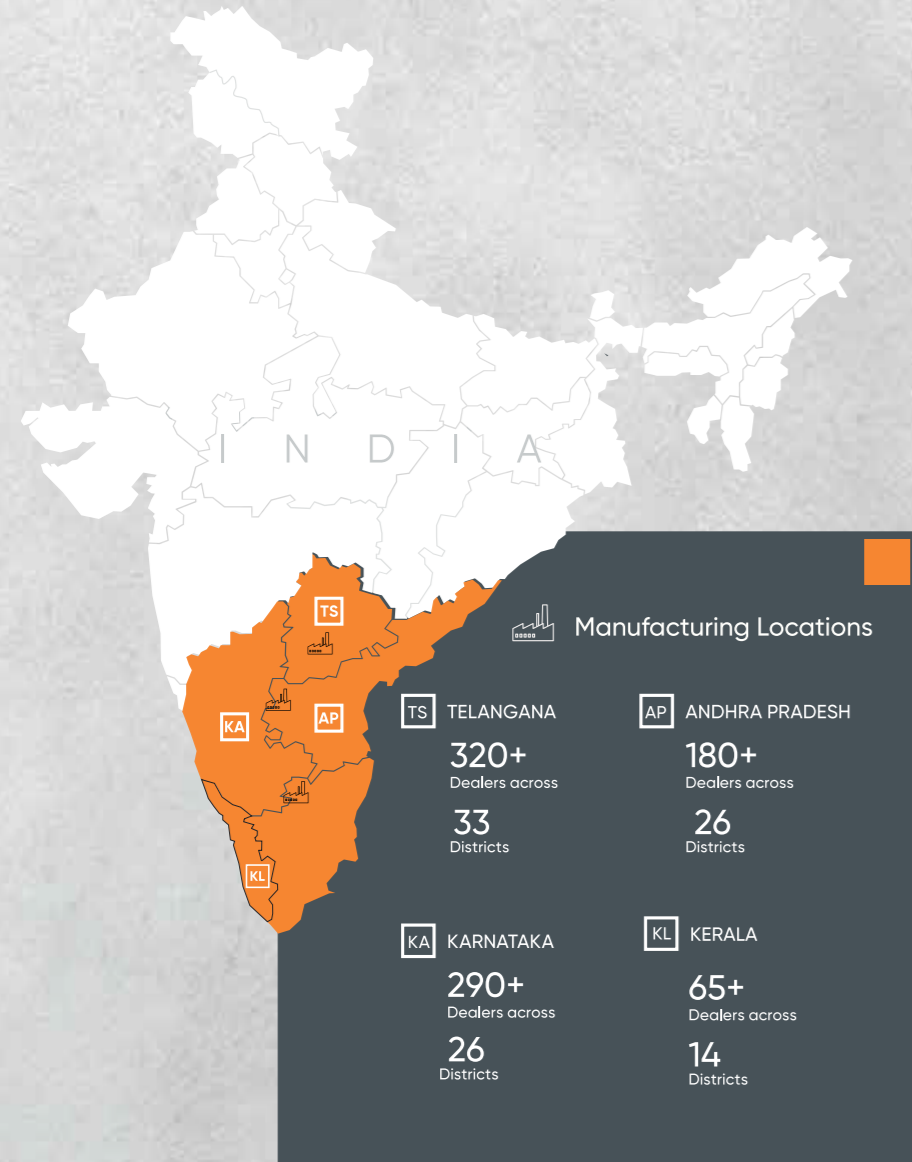

Hariom Pipe Industries Limited

Corporate Office

Samarpan, #3-4-174/12/2,
Near Pillar No. 125, Attapur,
Hyderabad - 500048,
Telangana

Manufacturing Locations

UNIT 1
Survey No.58 & 63,
Sheriguda 9v), Balanagar (M),
Mahabubnagar Dist - 509 202,
Telangana

UNIT 2
PLOT NO. B-15 to B-28, SIPCOT
INDL., Growth Centre, Perundu-
rai, Erode, Tamil Nadu, 638052

UNIT 3
Survey No .98 D.Hirehal
Village,D.Hirehal Mandal,
Ananthapur, Andhra pradesh
-515872

Warehouse:

H.No.2-34, Sy.no.151,
Dullapally Village, Qutubullapur
Mandal, Medchal District,
Telangana - 500014
Ph: +91 7207937903

NOTE- Only Warehouse in Telangana State, we do not have any branches.

Toll Free: 1800 1230 360

info@hariompipes.com
sales@hariompipes.com

Follow us:



Scaffolding PRODUCTS

We manufacture advanced scaffolding systems, including supported platform systems, suspended scaffolds and adjustable scaffolding systems.


Scaffolding systems represent a series of temporary work platforms that are erected on a construction site to reduce human efforts. Our wide range of quality products are used for scaffolding and structural purposes.

Scaffolding Systems are a series of temporary work platforms on a construction site. They are helpful in conducting construction activities above the ground level. We manufacture top quality Scaffolding Systems which have a longer life, accurate dimensions and can be customised as per the requirements of our clients.

SCAFFOLDING PRODUCTS

TELESCOPIC PROPS/ ADJUSTABLE PROPS/ JACKS/ PROPS


Props consist of an outer – made from an NB 50mm MS 'B' Class Pipe – and an inner – made from an NB 40mm MS 'B' Class Pipe. The inner slides in and out, adjusting the height as required, with support from a malleable cast iron nut. On both the ends, it is welded with an MS Base Plate of size 150x150x6mm, using CO₂ MIG. The Top Head is available in: L-Type, Beam Head, U-Head and Standard Flat Type.



CUPLOCK HORIZONTAL/ LEDGERS


Cuplock Horizontals/Ledgers are made from an NB 40mm 'B' Class Pipe with CO₂ MIG-welded Ledger blades on both ends.

Cuplock Horizontals/Ledgers are made from a 48 OD 'B' Class Pipe with CO₂ MIG-welded Ledger blades on both ends.



CUPLOCK VERTICALS


Cuplock Verticals are made from an NB 40mm MS 'B' Class Pipe with a malleable cast iron top cup and bottom cup. CO₂ MIG is used to weld both, at intervals of 500mm, centre to centre.

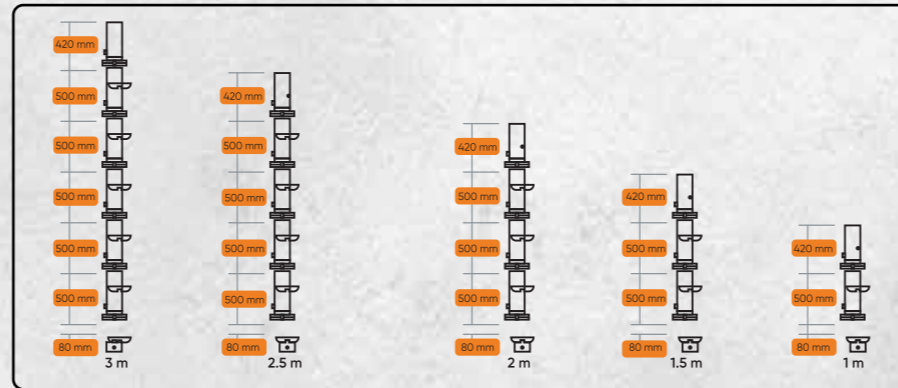

H FRAME SYSTEM


(Note: To make an H Frame set, we require two H Frames and two Cross Bracings)

H Frame Ladder types consist of a main structure – made from an NB 40mm MS 'B' Class Pipe – with an NB 20mm 'B' Class Pipe ladder structure that is arranged at equal distances.

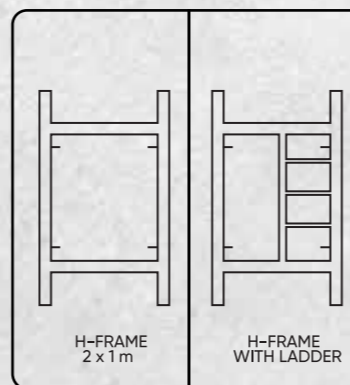

SPAN/ACRO SPAN/TELESCOPIC SPAN/ADJUSTABLE SPAN


Adjustable Spans are CO₂ MIG welded and made from 2mm thick HR Sheet and 8mm MS Rod. The outer span has a fixed length while the inner span slides in and out, adjusting the width as required.

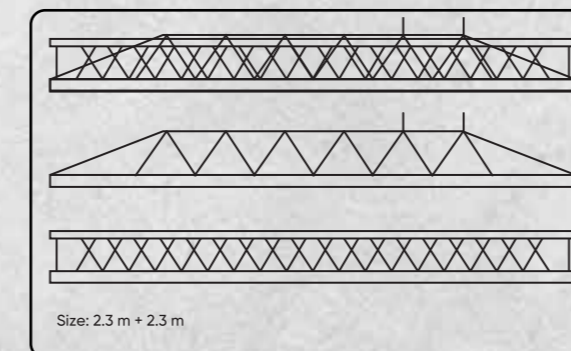

CROSS BRACE

Cross Bracings are made from NB 25mm MS 'B' Class Pipes.


(Note: Two units of NB 25mm MS 'B' Class Pipes together with nut bolts make one Cross Bracing)

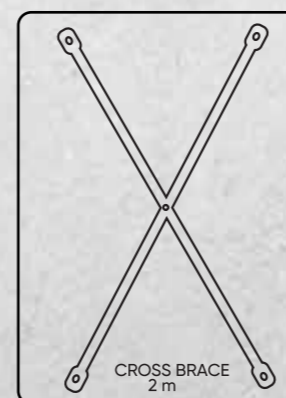

OTHER SCAFFOLDING PRODUCTS


JALLI (PLANK)

Jalli (Plank) is CO₂ MIG welded and made from 25x25x2mm thick MS Square Pipes, available in widths of 300mm and 400mm and lengths of 1.5m, 1.8m, 2m and 2.5m with a load bearing capacity of 220kg.

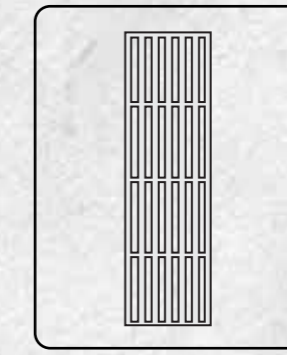

FIXED BASE PLATES

1. Fixed Base Plates are made from a 32 OD Solid Rod that is hydraulically threaded and CO₂ MIG-welded with a 150x150x6mm sized Base Plate.

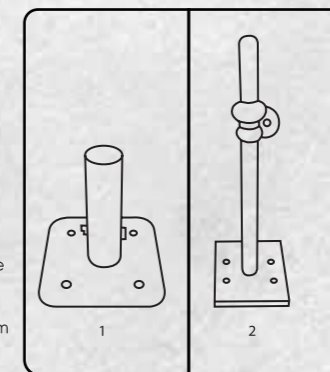


ADJUSTABLE BASE PLATES

2. Adjustable Base Plates are made from a 32 OD Solid Rod that is hydraulically threaded and CO₂ MIG-welded with a 150x150x6 mm sized Base Plate; also includes a malleable cast iron jack nut.


CLAMPS/COUPLERS

Swivel Coupler/Rotational Couplers are suitable for 40 NB Pipes. Fixed Coupler/Right Angle Clamps are suitable for 40 NB Pipes.

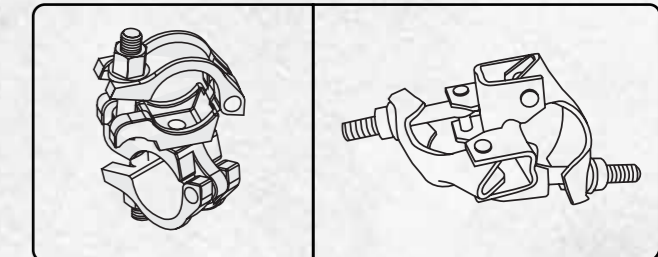

ADJUSTABLE U JACKS

3. Adjustable U Jacks are made from a 32 OD Solid Rod that is hydraulically threaded; the top is CO₂ MIG welded with a 75x75x125x6mm U Jack and also includes a malleable cast iron jack nut.



SPIGOT PIN/JOINT PINS

4. Spigot Pin/ Joint Pins made from 38 OD MS Round Hollow 'B' Class Pipes with holes on both ends.

Note: We also supply customized products as per client requirements.

Our Other High Grade Quality Products :

PIPES :



Hariom, at present, manufactures structural, conveyance and multiple industrial tubes at its plants in Telangana, Andhra Pradesh & Tamilnadu. Hariom manufactures tubes under the brand name HARIOM, conforming to IS:4923, IS:1161, IS:1239, IS:4270 and IS: 3601 standards for square, rectangular and circular sections respectively. Hariom can manufacture HR pipes up-to a maximum size of 150x150mm for square sections, 200x100mm for rectangular sections and 175mm NB for circular sections. The thickness varies from 1.2mm to 8mm. Hariom also manufactures GP and GI Pipes.

HR COILS:



Hariom Steel coils are used by various industries, as this type of metal is ideal for building panels, walls, roof panels, power stations, ships, and various other projects and construction undertakings. In addition to different sizes of steel coils, there are also two different primary types: Cold-rolled steel coils.

GI COILS:



Hariom GI Coils are made to meet industrial standards

GI COILS SPECIFICATIONS

Coil ID	: 508/610mm	Surface treatment	: Chemical treated or oil coated
Max width	: 50-750mm	Spangle	: Regular, minimized or zero
Zinc Capacity	: 80GSM to 275GSM	3m surface quality	: Passed or as coated surface
Edges	: Slit and oil - coated	Coil	: Soft and full hard
Thickness	: 0.8mm to 3.6mm	Tensile strength	: Range 350 N/mm ² to 550 N/mm ² depends on the thickness

METAL CRASH GUARDS:



Hariom Highway Guardrails are the need of today and tomorrow for ensuring safety and security of lives on road, metal crash barrier is an essential and crucial product in today's fast paced life. This ensures safety and security of people and vehicles during unforeseen road accidents or mishaps. Moreover, metal crash barriers are beneficial for drivers travelling in late nights.